




WATER / WASSER



PNEUMATIC / PNEUMATISCH



HYDRAULIC / HYDRAULISCH



ACCESSORIES / ZUBEHÖR

T039 *SERIES*

tekno-met

QUICK COUPLINGS-SCHNELLKUPPLUNGEN

www.tekno-met.com



T039 Series

DN 19 Coupling for Pneumatic / DN 19 Kupplung für Pneumatik

Interchangeability / Austauschbarkeit

Rectus 39KA
Rectus 39KB
Cejn 408
Tema 1800

Temperature Range / Temperaturbereich

Nitrile (N) -20°C - +100°C
FDM (V) -20°C - +180°C
EPDM (Ethylene Propylene) -40°C - +150°C

Working Pressure / Betriebsdruck

35 Bar (510 PSI)

Flow Size - Nennweite

T039 19 mm

Material of Standard Version / Material für die Standardversion

Socket Body / Kupplungsgrundkörper	Brass / Messing
Sleeve / Hülse	Brass / Messing
Springs / Federn	Stainless Steel / Edelstahl
Balls / Kugeln	Stainless Steel / Edelstahl
Seals / Dichtung	Nitrile
Plug / Nippel	Brass / Messing

Options / Optionen

C : Steel / Stahl
S : 303 Stainless Steel / 303 Edelstahl
S6: 316L Stainless Steel / 316L Edelstahl

Technical Specifications


One hand operated
High flow rate
Minimum pressure loss
Corrosion resistant

Technische Daten und Vorteile

Vorteil durch Einhandbedienung
Hohem Durchfluss
Geringem Druckverlust
Korrosionsbeständig



Flow Rate - Pressure Drop / Durchfluss - Druckverlust




T039 Series

- Quick Coupling for Pneumatic / Schnellkupplungen für Pneumatik




Male Thread Socket / Kupplung mit Aussengewinde

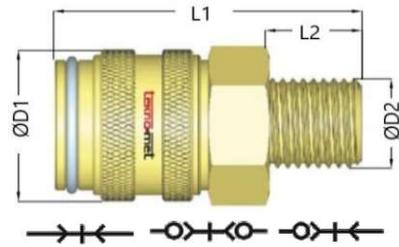

ORDER NO / BESTELL NR. With Valve/Mit Ventil -O+←	ORDER NO / BESTELL NR. Without Valve/Ohne Ventil →+←	ORDER NO / BESTELL NR. Double Valve/Doppelt Ventil -O+←-O+←	SIZE GRÖßE	ØD2	ØD1	L1	L2	Hex
T039 EGB 21	T039 EGF 21	T039 EGI 21	19	BSP 1/2	45	99	19	27
T039 EGB 26	T039 EGF 26	T039 EGI 26	19	BSP 3/4	45	99	19	34
T039 EGB 33	T039 EGF 33	T039 EGI 33	19	BSP 1	45	99	19	41
T039 EGB 42	T039 EGF 42	T039 EGI 42	19	BSP 1-1/4	45	99	19	44




Female Thread Socket / Kupplung mit Innengewinde

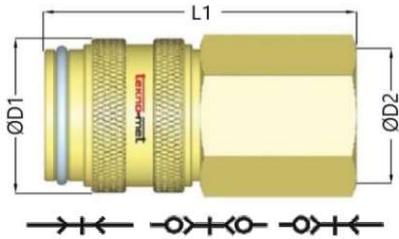

ORDER NO / BESTELL NR. With Valve/Mit Ventil -O+←	ORDER NO / BESTELL NR. Without Valve/Ohne Ventil →+←	ORDER NO / BESTELL NR. Double Valve/Doppelt Ventil -O+←-O+←	SIZE GRÖßE	ØD2	ØD1	L1	Hex
T039 DGB 21	T039 DGF 21	T039 DGI 21	19	BSP 1/2	45	96	27
T039 DGB 26	T039 DGF 26	T039 DGI 26	19	BSP 3/4	45	96	34
T039 DGB 33	T039 DGF 33	T039 DGI 33	19	BSP 1	45	96	41
T039 DGB 42	T039 DGF 42	T039 DGI 42	19	BSP 1-1/4	45	96	44



Standard Hose Tail Socket / Kupplung mit Standard - Schlauchtülle

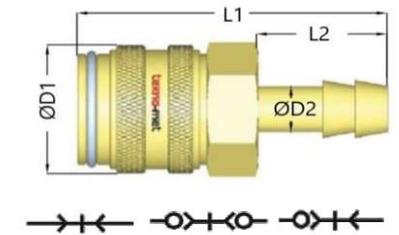


ORDER NO / BESTELL NR. With Valve/Mit Ventil -O+←	ORDER NO / BESTELL NR. Without Valve/Ohne Ventil →+←	ORDER NO / BESTELL NR. Double Valve/Doppelt Ventil -O+←-O+←	SIZE GRÖßE	ØD2	ØD1	L1	L2	Hex
T039 HGB 13	T039 HGF 13	T039 HGI 13	19	13 mm	45	112	35	41
T039 HGB 16	T039 HGF 16	T039 HGI 16	19	16 mm	45	112	35	41
T039 HGB 19	T039 HGF 19	T039 HGI 19	19	19 mm	45	112	35	41
T039 HGB 25	T039 HGF 25	T039 HGI 25	19	25 mm	45	112	35	41

T039 Series - Quick Coupling for Pneumatic / Schnellkupplungen für Pneumatik

tekno-met


Male Thread Plug / Nippel mit Aussengewinde

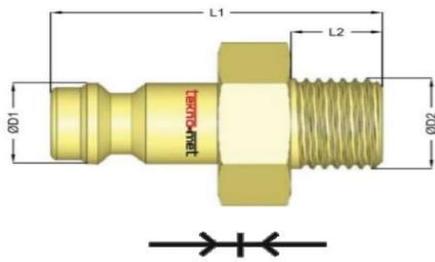

ORDER NO / BESTELL NR. Without Valve/Ohne Ventil	SIZE GRÖßE	ØD2	ØD1	L1	L2	Hex
T039 EUF 21	19	BSP 1/2	27	58	17	24
T039 EUF 26	19	BSP 3/4	27	58	17	27
T039 EUF 33	19	BSP 1	27	58	17	34
T039 EUF 42	19	BSP 1-1/4	27	58	17	41

tekno-met


Female Thread Plug / Nippel mit Innengewinde

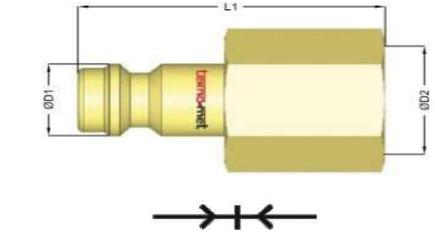

ORDER NO / BESTELL NR. Without Valve/Ohne Ventil	SIZE GRÖßE	ØD2	ØD1	L1	Hex
T039 DUF 21	19	BSP 1/2	27	58	27
T039 DUF 26	19	BSP 3/4	27	58	34
T039 DUF 33	19	BSP 1	27	58	41
T039 DUF 42	19	BSP 1-1/4	27	58	44

tekno-met


Standard Hose Tail Plug/ Nippel mit Standard - Schlauchtülle

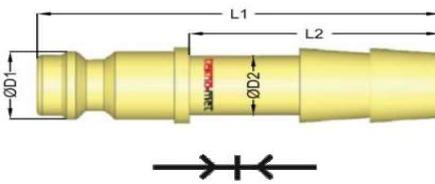

ORDER NO / BESTELL NR. Without Valve/Ohne Ventil	SIZE GRÖßE	ØD2	ØD1	L1	L2
T039 HUF 13	19	13 mm	27	68	35
T039 HUF 16	19	16 mm	27	68	35
T039 HUF 19	19	19 mm	27	68	35
T039 HUF 25	19	25 mm	27	68	35

tekno-met


Male Thread Plug with Valve / Nippel mit Aussengewinde mit Ventil

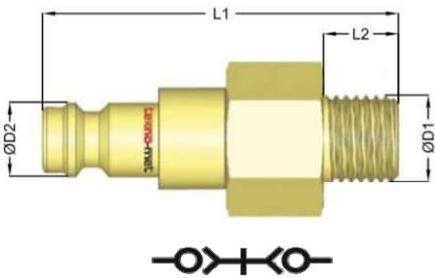

ORDER NO / BESTELL NR. Double Valve/Doppelt Ventil	SIZE GRÖßE	ØD1	ØD2	L1	L2	Hex
T039 EUI 21	19	BSP 1/2	27	97	19	41
T039 EUI 26	19	BSP 3/4	27	97	19	41
T039 EUI 33	19	BSP 1	27	97	19	41
T039 EUI 42	19	BSP 1-1/4	27	97	19	44

tekno-met


Female Thread Plug with Valve / Nippel mit Innengewinde mit Ventil

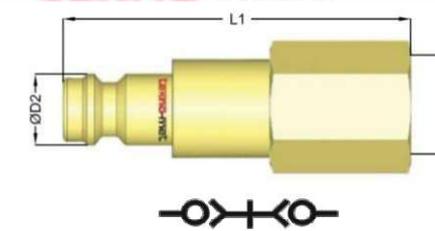

ORDER NO / BESTELL NR. Double Valve/Doppelt Ventil	SIZE GRÖßE	ØD1	ØD2	L1	Hex
T039 DUI 21	19	BSP 1/2	27	97	41
T039 DUI 26	19	BSP 3/4	27	97	41
T039 DUI 33	19	BSP 1	27	97	41
T039 DUI 42	19	BSP 1-1/4	27	97	44

tekno-met

Standard Hose Tail Plug with Valve / Nippel mit Standard - Schlauchtülle mit Ventil

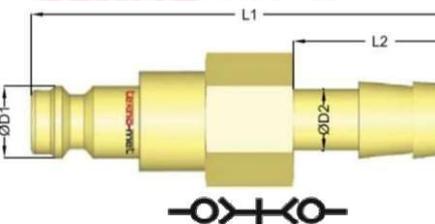

ORDER NO / BESTELL NR. Double Valve/Doppelt Ventil	SIZE GRÖßE	ØD2	ØD1	L1	L2	Hex
T039 HUI 13	19	13 mm	27	111	35	41
T039 HUI 16	19	16 mm	27	111	35	41
T039 HUI 19	19	19 mm	27	111	35	41
T039 HUI 25	19	25 mm	27	111	35	41