

# T015 SERIES

**tekno-met**

QUICK COUPLINGS-SCHNELLKUPPLUNGEN

[www.tekno-met.com](http://www.tekno-met.com)

WATER / WASSER

PNEUMATIC / PNEUMATISCH

HYDRAULIC / HYDRAULISCH

ACCESSORIES/ ZUBEHÖR

**Temperature Range / Temperaturbereich**

Nitrile (N) -20°C - +100°C  
 FDM (V) -20°C - +180°C  
 EPDM (Ethylene Propylene) -40°C - +150°C

**Working Pressure / Betriebsdruck**

35 Bar (510 PSI)

**Flow Size - Nennweite**

T015 05 5 mm

**Material of Standard Version /  
 Material für die Standardversion**

Socket Body / Kupplungsgrundkörper	Brass nickel plated Messing vernickelt
Sleeve / Hülse	Steel nickel plated Stahl Nickel beschichtet
Springs / Federn	Stainless Steel / Edelstahl
Balls / Kugeln	Stainless Steel / Edelstahl
Seals / Dichtung	Nitrile (N)
Plug / Nippel	Steel zinc-nickel plated Stahl Zink-Nickel beschichtung




## T015 Series

- Quick Coupling for Pneumatic / Schnellkupplungen für Pneumatik




Male Thread Socket / Kupplung mit Aussengewinde

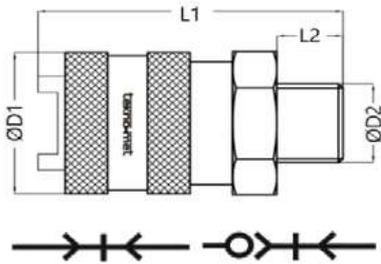

ORDER NO / BESTELL NR. With Valve/Mit Ventil ↔↔↔	ORDER NO / BESTELL NR. Without Valve/Ohne Ventil ↔↔↔	SIZE GRÖßE	ØD2	ØD1	L1	L2	Hex
T015 05 RGB M10	T015 05 RGF M10	5	M10X1	18	30	7	16
T015 05 RGB 10	T015 05 RGF 10	5	BSPT 1/8	18	30	7	16
T015 05 RGB 13	T015 05 RGF 13	5	BSPT 1/4	18	30	7	16




Female Thread Socket / Kupplung mit Innengewinde

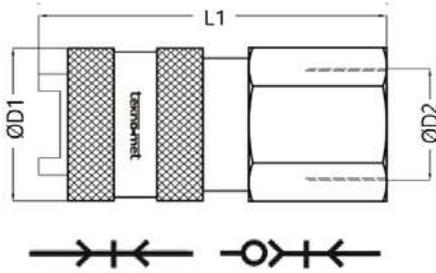

ORDER NO / BESTELL NR. With Valve/Mit Ventil ↔↔↔	ORDER NO / BESTELL NR. Without Valve/Ohne Ventil ↔↔↔	SIZE GRÖßE	ØD2	ØD1	L1	Hex
T015 05 QGB M10	T015 05 DGF M10	5	M10X1	18	30	16
T015 05 QGB 10	T015 05 QGF 10	5	BSPT 1/8	18	30	16
T015 05 QGB 13	T015 05 QGF 13	5	BSPT 1/4	18	30	16




Standard Hose Tail Socket / Kupplung mit Standard - Schlauchtülle

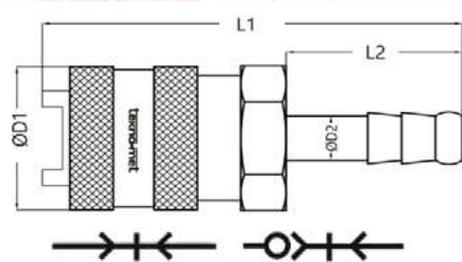

ORDER NO / BESTELL NR. With Valve/Mit Ventil ↔↔↔	ORDER NO / BESTELL NR. Without Valve/Ohne Ventil ↔↔↔	SIZE GRÖßE	ØD2	ØD1	L1	L2
T015 05 HGB 06	T015 05 HGF 06	5	6 mm	18	41	18
T015 05 HGB 08	T015 05 HGF 08	5	8 mm	18	41	18
T015 05 HGB 10	T015 05 HGF 10	5	10 mm	18	41	18




Male Thread Plug / Nippel mit Aussengewinde

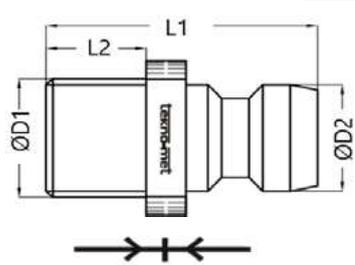

ORDER NO / BESTELL NR. Without Valve/Ohne Ventil ↔↔↔	SIZE GRÖßE	ØD1	ØD2	L1	L2
T015 05 RUF M10	5	M10X1	9	21	7
T015 05 RUF 10	5	BSPT 1/8	9	21	7
T015 05 RUF 13	5	BSPT 1/4	9	21	7




Female Thread Plug / Nippel mit Innengewinde

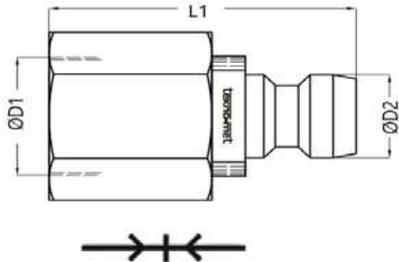

ORDER NO / BESTELL NR. Without Valve/Ohne Ventil ↔↔↔	SIZE GRÖßE	ØD1	ØD2	L1	Hex
T015 05 QUF M10	5	M10X1	9	21	14
T015 05 QUF 10	5	BSPT 1/8	9	21	14
T015 05 QUF 13	5	BSPT 1/4	9	21	15



Standard Hose Tail Plug / Nippel mit Standard - Schlauchtülle

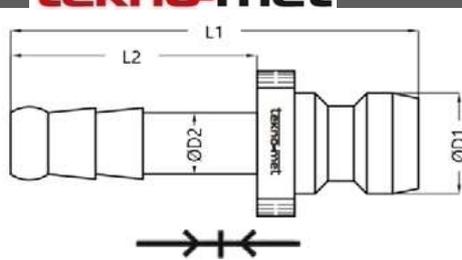

ORDER NO / BESTELL NR. Without Valve/Ohne Ventil ↔↔↔	SIZE GRÖßE	ØD2	ØD1	L1	L2
T015 05 HUF 06	5	6 mm	9	33	20
T015 05 HUF 08	5	8 mm	9	33	20
T015 05 HUF 10	5	10 mm	9	33	20